


Charisma™ Picture Frame - XSP Series

Applicable Products:

XSP Series

1. For units with a split section, join the two halves of each section as shown below, then tighten the the set screws of the joiner plates two fasten the frame halves. Repeat this step for additional split sections.
2. For each corner, align bracket with channel on frame extrusion. Once aligned, tighten screw to secure brackets inside the channel.
3. To install the graphic, take the corner with the pull tag on it and press about 6"-10" of silicone into the frame channel corner A. Repeat for the opposite corner B. Repeat for the next corner C. Lastly, repeat for the final corner D.
4. After all corners are pressed in, press the silicone into the frame channel at the mid-points on all four sides.
5. Press silicone into frame evenly between the corner and midpoints. This prevents the graphic from bunching up or stretching too much and will ensure a smooth and tight fit. Repeat steps 6-8 on the second side.
6. To remove the graphic from the frame, simply pull up on the pull tag.

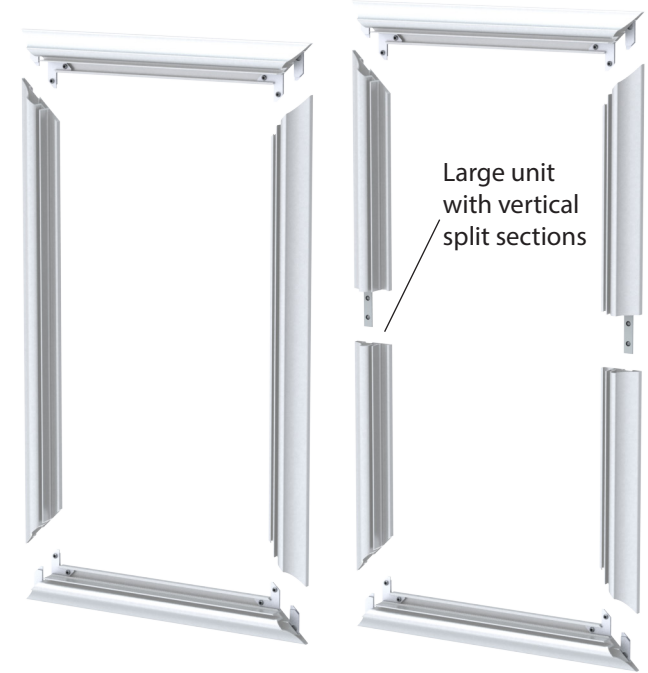

NOTE: Although the model shown below may differ from your model, assembly instructions remain the same.

